


635nm Laser Diode

635nm Red Laser Diode
EO-LD-633541A-preliminary

■ Specifications

- (1) Device: Laser Diode
- (2) Structure: TO-18(dia 5.6mm), with Pb free glass cap, PD

■ External dimensions(Unit : mm)

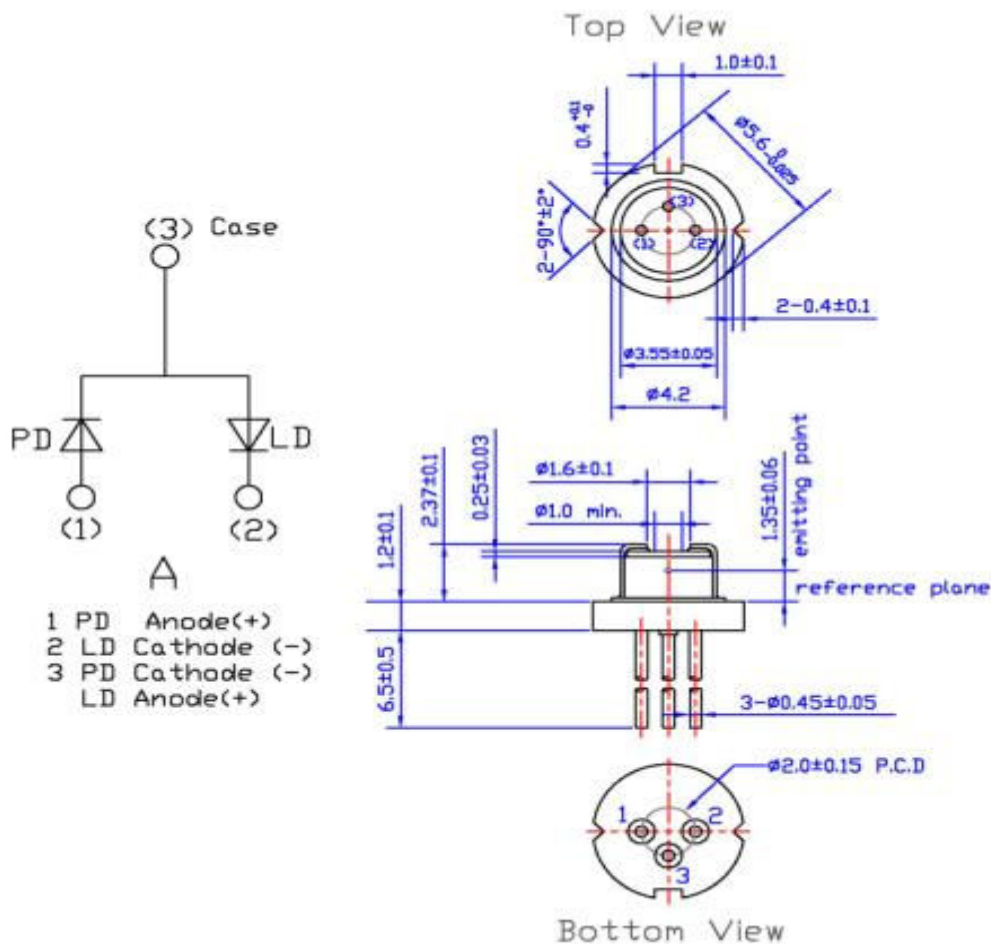

■ Absolute Maximum Ratings($T_c=25^\circ\text{C}$)

Parameter	Symbols	Ratings	Units
Optical Output	Po	35	mW
Reverse Voltage	Laser	Vr	2 V
	PIN PD	Vr	30 V
Operating Temperature	Top	-10 ~ +40	deg C
Storage Temperature	Tstg	-40 ~ +85	deg C

Ver.2 2009/10

EO-LD-633541A-preliminary

635nm Laser Diode

EKSMA OPTICS


■ Electrical and optical Characteristics(Tc=25°C)

Parameter	Symbols	Conditions	Min.	Typ.	Max.	Units	
Threshold Current	I _{th}	-	-	50	60	mA	
Operating Current	I _{op}	P _o =35mW	-	95	105	mA	
Operating Voltage	V _{op}	-	-	2,3	2,45	Volts	
Slope Efficiency	η	2.5mW-32.5mW	0,5	0,75	-	mW	
		I _{12,5mW} -I _{32,5mW}				mA	
Monitor current	I _m	P _o =35mW	0,05	0,3	1	mA	
Beam Divergence (FWHM)	Parallel	θ//	P _o =35mW	7	8,5	9,5	deg.
	Prependicular	θ⊥	P _o =35mW	-	33	35	deg.
Lasing Wavelength	λ	P _o =35mW	635	639	642	nm	


⊙θ// and ⊙θ⊥ are defined as the angle within which the intensity is 50% of the peak value.

■ Typical characteristic curves

Optical Output Power v.s. Forward Current

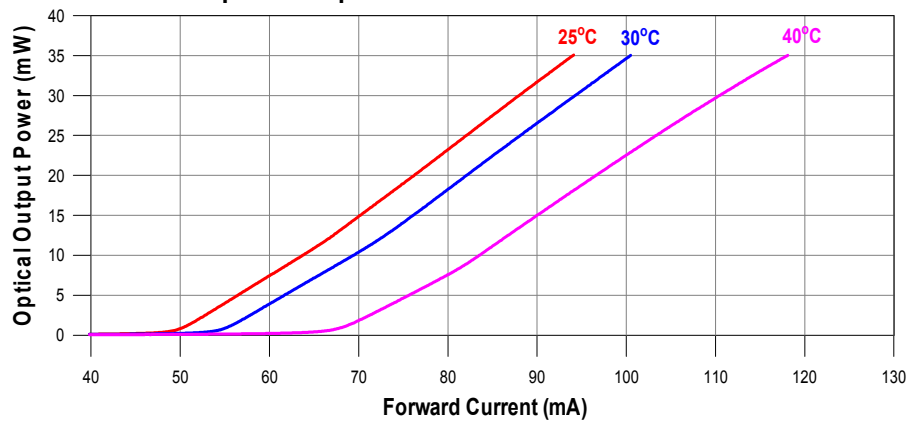

Forward Voltage v.s. Forward Current

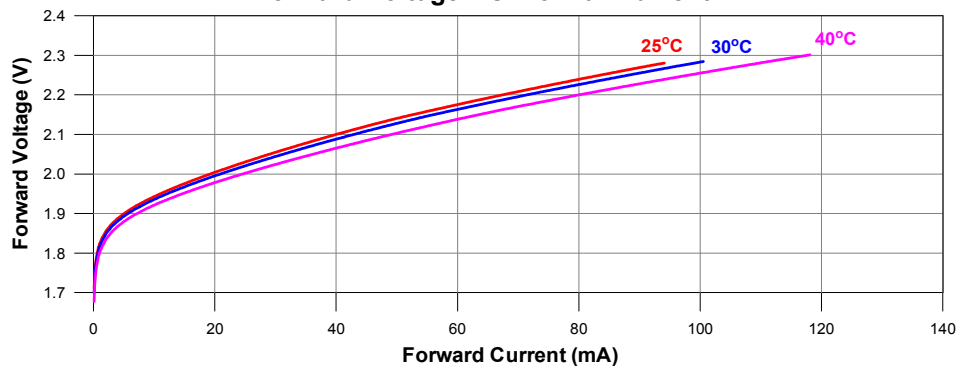


EO-LD-633541A-preliminary


635nm Laser Diode

EKSMA OPTICS


Peak Wavelength v.s. Case Temperature

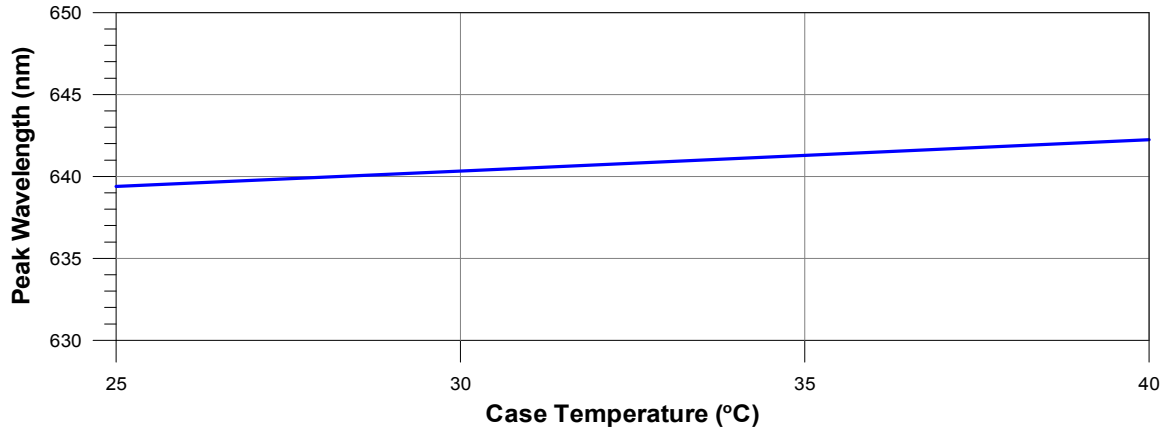

Far-Field Pattern

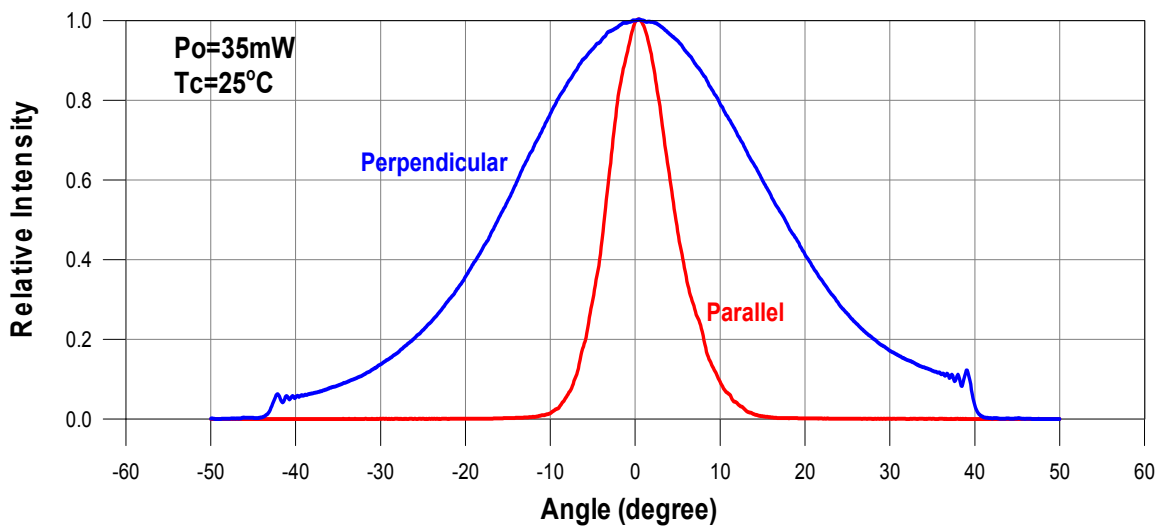

Monitor Current v.s. Optical Output Power

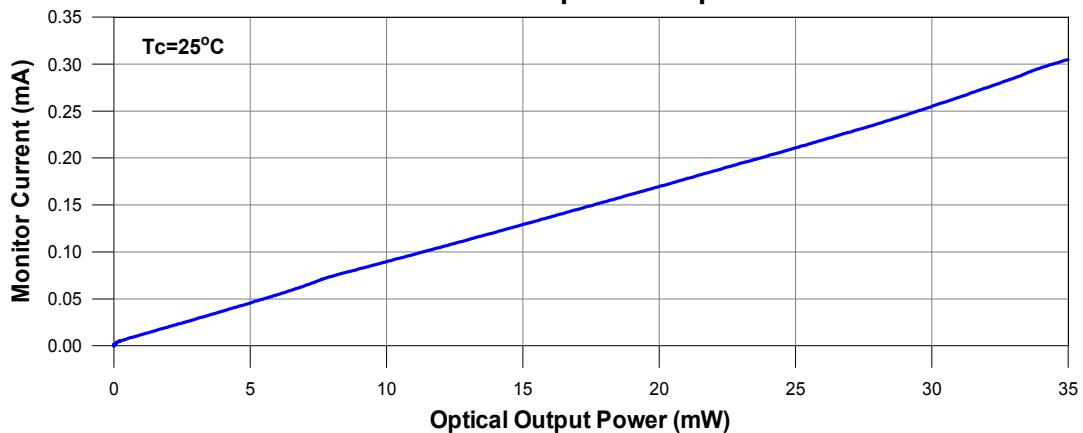


EO-LD-633541A-preliminary


635nm Laser Diode

EKSMA OPTICS

Slope Efficiency v.s. Case Temperature

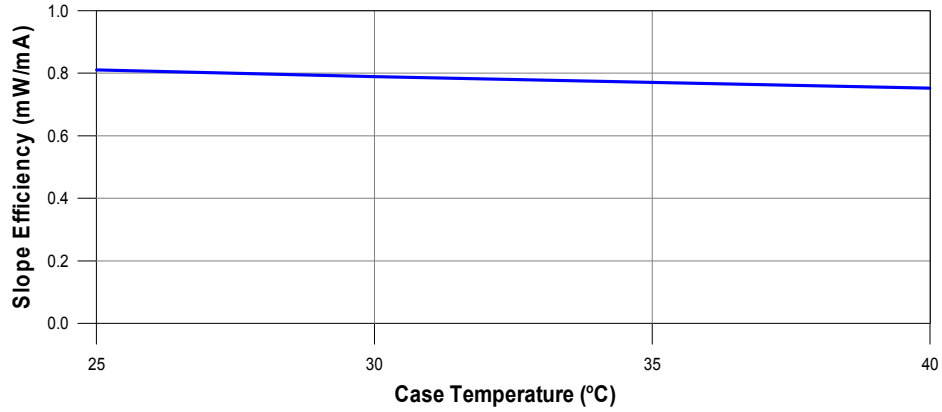

Threshold Current v.s. Case Temperature

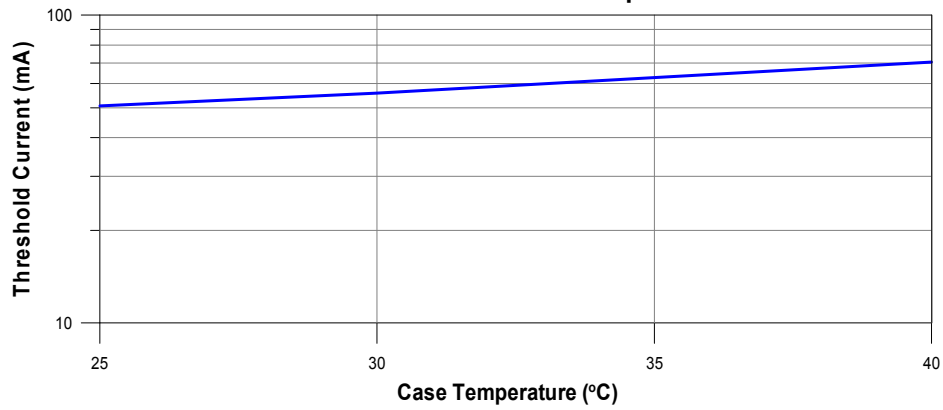

■Precautions

QUALITY ASSURANCE

After any processing of laser chip or laser diode TO-CAN (LD) by the customer, the performance, yield and reliability of the product, in which the chip or LD is applied, are subject to change due to customer's handling, assembly, testing, and processing. Because laser chip and LD are strongly affected by environmental conditions, physical stress, and chemical stresses imposed by customer that are not in EKSMA OPTICS control and hence no guarantee on the characteristics and the reliability at all after the shipment. Also, EKSMA OPTICS does not have any responsibility for field failures in a customer product. When attaching a heat sink to laser chip or LD, be careful not to apply excessive force to the device in the process.

SAFETY PRECAUTIONS

Although EKSMA OPTICS keeps improving quality and reliability of its laser chip and laser diode TO-CAN (LD), semiconductor devices in general can malfunction or fail due to their intrinsic characteristics. Hence, it is required that the customer's products are designed with full regard to safety by incorporating the redundancy, fire prevention, error prevention so that any problems or error with laser chip or LD does not cause any accidents resulting in injury, death, fire, property damage, economic damage, or environmental damage. In case customer wants to use laser chip or LD in the systems requiring high safety, customer is requested to confirm safety of entire systems with customer's own testing.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

The information provided by EKSMA OPTICS, including but not limited to technical specifications, recommendations, and application notes relating to laser chip or laser diode TO-CAN (LD) is believed to be reliable and accurate and is subject to change without notice. EKSMA OPTICS reserves the right to change its assembly, test, design, form, specification, control, or function without notice.